


- Diameter: 47 mm
- Work range base 0-14 dpt, cyl 0-4 dpt (max. 14 dpt in strongest meridian)
- Polyurethane based polish carrier
- Lifetime: Up to 2,500 to 3,000 seconds

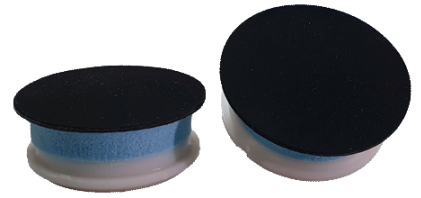

Standard

Description	Ref.
Standard Blue Foam Number 0/0	SL-A-0
Standard Blue Foam Number 1/1	SL-A-1
Standard Blue Foam Number 2/2	SL-A-2
Standard Blue Foam Number 3/3	SL-A-3
Standard Blue Foam Number 4/4	SL-A-4
Standard Blue Foam Number 5/5	SL-A-5
Standard Blue Foam Number 6/6	SL-A-6
Standard Blue Foam Number 7/7	SL-A-7
Standard Blue Foam Number 8/8	SL-A-8
Standard Blue Foam Number 9/9	SL-A-9
Standard Blue Foam Number 10/10	SL-A-10
Standard Blue Foam Number 11/11	SL-A-11
Standard Blue Foam Number 12/12	SL-A-12
Standard Blue Foam Number 13/13	SL-A-13
Standard Blue Foam Number 14/14	SL-A-14

- Diameter: 47 mm
- Work range base 0-14 dpt, cyl 0-4 dpt (max. 14 dpt in strongest meridian)
- Polyurethane based polish carrier
- Lifetime: Up to 3,000 to 4,000 seconds



Premium

Description	Ref.
Premium Blue Foam Number 0/0	SL-APB-0
Premium Blue Foam Number 1/1	SL-APB-1
Premium Blue Foam Number 2/2	SL-APB-2
Premium Blue Foam Number 3/3	SL-APB-3
Premium Blue Foam Number 4/4	SL-APB-4
Premium Blue Foam Number 5/5	SL-APB-5
Premium Blue Foam Number 6/6	SL-APB-6
Premium Blue Foam Number 7/7	SL-APB-7
Premium Blue Foam Number 8/8	SL-APB-8
Premium Blue Foam Number 9/9	SL-APB-9
Premium Blue Foam Number 10/10	SL-APB-10
Premium Blue Foam Number 11/11	SL-APB-11
Premium Blue Foam Number 12/12	SL-APB-12
Premium Blue Foam Number 13/13	SL-APB-13
Premium Blue Foam Number 14/14	SL-APB-14

- Diameter: 47 mm
- Work range base 0-14 dpt, cyl 0-4 dpt (max. 14 dpt in strongest meridian)
- Polyurethane based polish carrier.
- Lifetime: Up to 2,500 to 3,000 seconds.



Standard

Description	Ref.
Standard Blue Foam Number 1/1	SL-DS-1
Standard Blue Foam Number 3/3	SL-DS-3
Standard Blue Foam Number 5/5	SL-DS-5
Standard Blue Foam Number 7/7	SL-DS-7
Standard Blue Foam Number 9/9	SL-DS-9
Standard Blue Foam Number 11/11	SL-DS-11
Standard Blue Foam Number 13/13	SL-DS-13



MAGUTECH

TECHNICAL POLYMERS SPECIALIST

# DUO-/TORO-FLEX

- Diameter: 47 mm
- Work range base 0-14 dpt, cyl 0-4 dpt (max. 14 dpt in strongest meridian)
- Polyurethane based polish carrier
- Lifetime: Up to 3,000 to 4,000 seconds



Premium

Description	Ref.
Premium Blue Foam Number 1/1	SL-DPB-1
Premium Blue Foam Number 3/3	SL-DPB-3
Premium Blue Foam Number 5/5	SL-DPB-5
Premium Blue Foam Number 7/7	SL-DPB-7
Premium Blue Foam Number 9/9	SL-DPB-9
Premium Blue Foam Number 11/11	SL-DPB-11
Premium Blue Foam Number 13/13	SL-DPB-13

# XL Duo-/TORO-FLEX

- Diameter: 47 mm
- Work range base 0-14 dpt, cyl 0-4 dpt (max. 14 dpt in strongest meridian)
- Polyurethane based polish carrier
- Lifetime: Up to 4,500 to 5,500 seconds



Premium

Description	Ref.
Premium Pink Foam Number 1/1	SL-DP-1
Premium Pink Foam Number 3/3	SL-DP-3
Premium Pink Foam Number 5/5	SL-DP-5
Premium Pink Foam Number 7/7	SL-DP-7
Premium Pink Foam Number 9/9	SL-DP-9
Premium Pink Foam Number 11/11	SL-DP-11
Premium Pink Foam Number 13/13	SL-DP-13

- Diameter: 47 mm
- Work range base 0-14 dpt, cyl 0-4 dpt (max. 14 dpt in strongest meridian)
- Polyurethane based polish carrier
- Lifetime: Up to 2,500 to 3,500 seconds



SpeedFlex

Description	Ref.
SpeedFlex Pink Foam Number 1/1	SL-DSF-1
SpeedFlex Pink Foam Number 3/3	SL-DSF-3
SpeedFlex Pink Foam Number 5/5	SL-DSF-5
SpeedFlex Pink Foam Number 7/7	SL-DSF-7
SpeedFlex Pink Foam Number 9/9	SL-DSF-9
SpeedFlex Pink Foam Number 11/11	SL-DSF-11
SpeedFlex Pink Foam Number 13/13	SL-DSF-13



MAGUTECH

TECHNICAL POLYMERS SPECIALIST

# DUO-/TORO-FLEX

- Diameter: 47 mm
- Work range base 0-14 dpt, cyl 0-4 dpt (max. 14 dpt in strongest meridian)
- Polyurethane based polish carrier.
- Lifetime: Up to 2,500 to 3,000 seconds.



Basic

Description	Ref.
BasicFlex Number 1/1	SL-DB-1
BasicFlex Number 3/3	SL-DB-3
BasicFlex Number 5/5	SL-DB-5
BasicFlex Number 7/7	SL-DB-7
BasicFlex Number 9/9	SL-DB-9
BasicFlex Number 11/11	SL-DB-11
BasicFlex Number 13/13	SL-DB-13



**MAGUTECH**

TECHNICAL POLYMERS SPECIALIST

- Work range base 0-14 dpt, cyl 0-4 dpt (max. 14 dpt in strongest meridian)
- Highly versatile: polishes all lens formats (toric, spherical, free-form, convex & concave)
- Diameter:
  - 48mm (S)



Black Felt



PU

Description	Ref.
MultiFlex Black Felt	SL-MFS-BF
MultiFlex PU	SL-MFS-P



MAGUTECH

TECHNICAL POLYMERS SPECIALIST



- Work range base 0-14 dpt, cyl 0-4 dpt (max. 14 dpt in strongest meridian)
- Highly versatile: polishes all lens formats (toric, spherical, free-form, convex &concave)
- Diameter:
  - 56mm

Description	Ref.
MultiFlex XL Black Felt	SL-MF-BF
MultiFlex XL PU	SL-MF-P
MultiFlex XL LP	SL-MF-LP
MultiFlex XL White LP	SL-MF-LP2



Black Felt



PU



LP



LP White



- Work range base 0-14 dpt, cyl 0-4 dpt (max. 14 dpt in strongest meridian)
- Polyurethane based polish carrier.

Description	Ref.
DLP/Micro Flex 50mm	SL-DLP-50
DLP/Mircro Flex 55mm	SL-DLP-55
DLP/Mirco Flex 70mm	SL-DLP-70



50mm



55mm



70mm



MAGUTECH

TECHNICAL POLYMERS SPECIALIST

Duo-Flex Tool Suport



SL-MTS

Auto Flex Plastic Tool



SL-TH-AI

DLP Pin



PIN-SL-DLP

MultiFlex Clamp



SL-MFC

Clamp



SL-RC

Interior Pin



PIN-EF-S

Tool Holder Base



SL-THB

Tool Holder Rubber



SL-RS

Steel tool holder



SL-TH-DT

DuoFlex Tool Holder Set



SL-TH-FDT

AutoFlex Tool Holder Set



SL-TH-FAI



**MAGUTECH**

TECHNICAL POLYMERS SPECIALIST